




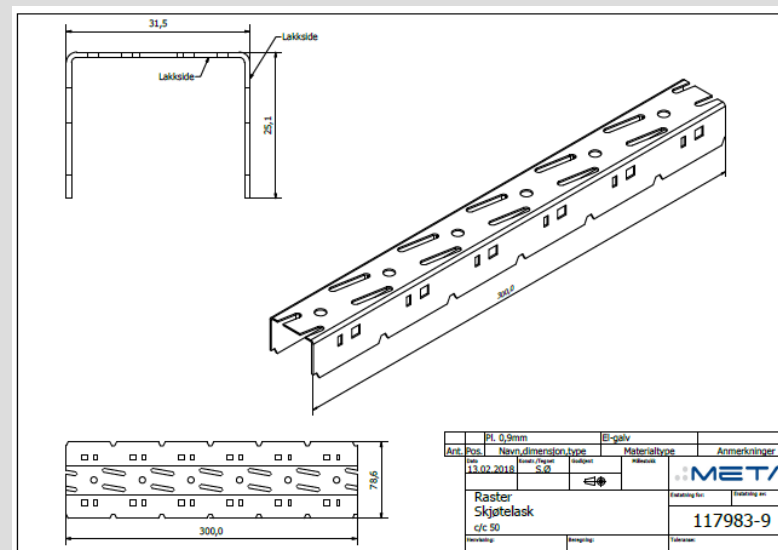


DELTA CELL – DELTA GRID

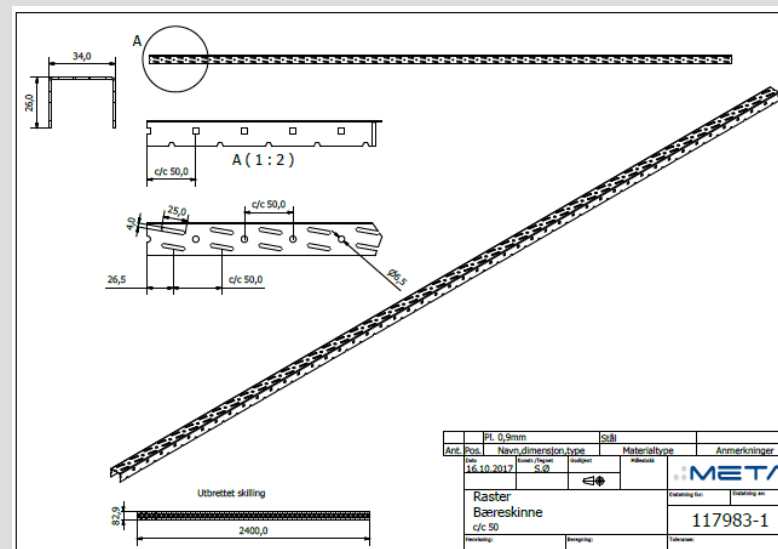

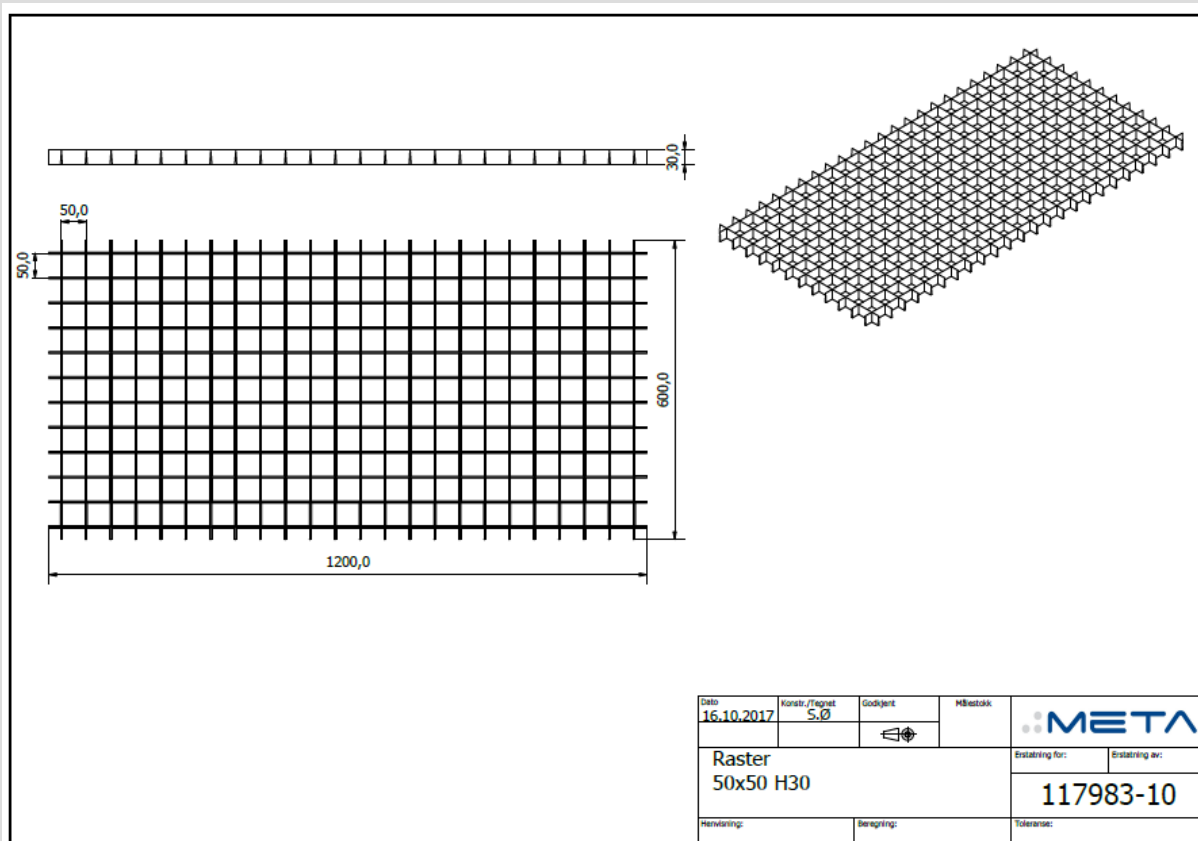



Deltagrid

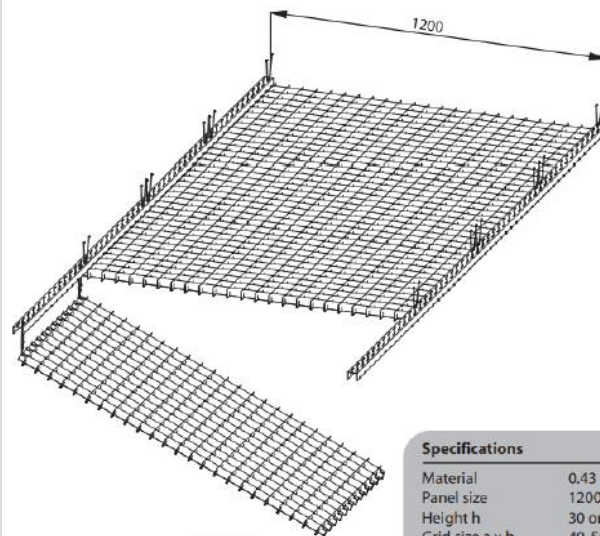


Specifications

Material	0.43 Alum
Panel size	1200x600
Height h	30 or 35 mm
Grid size a x b	40, 50, 60, 75 or 100 mm
Standard colors	RAL9003, RAL9006 or RAL9005
Special colors	on request

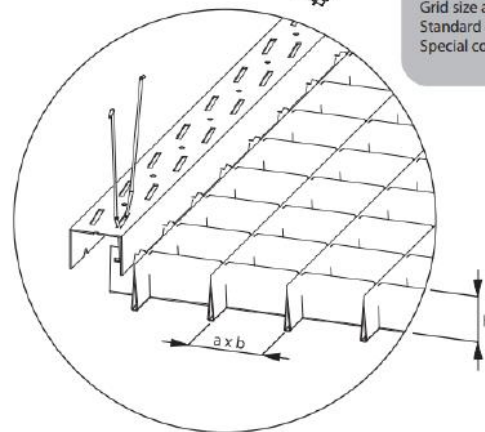


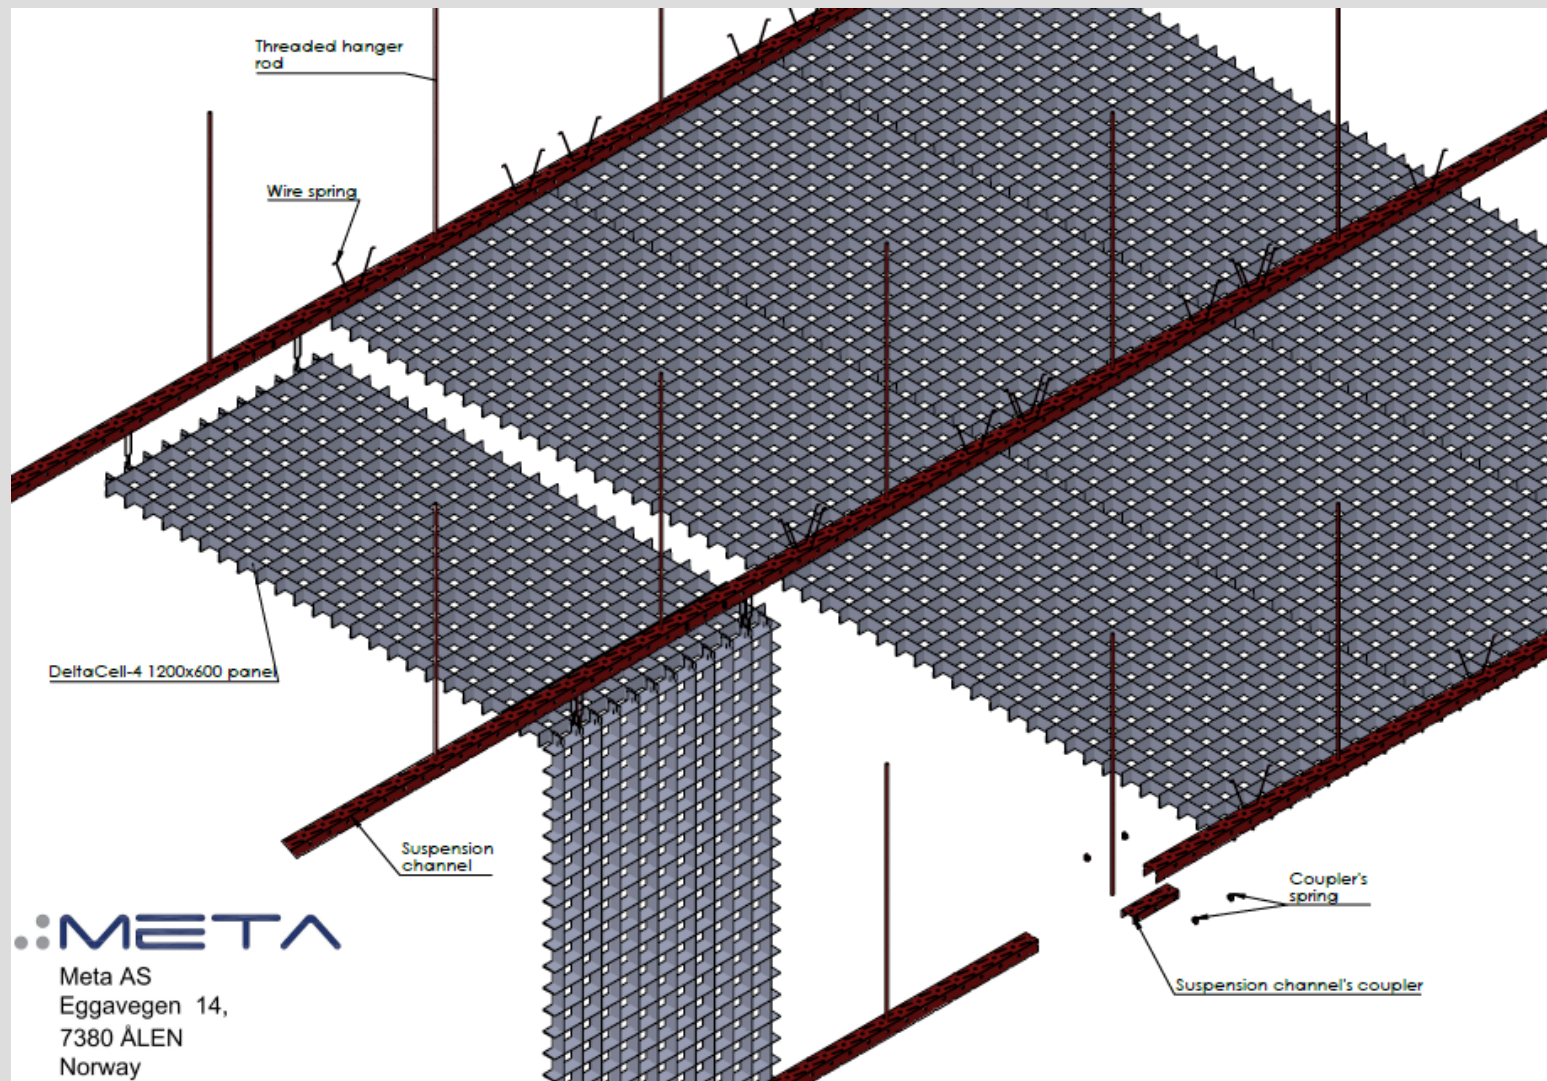


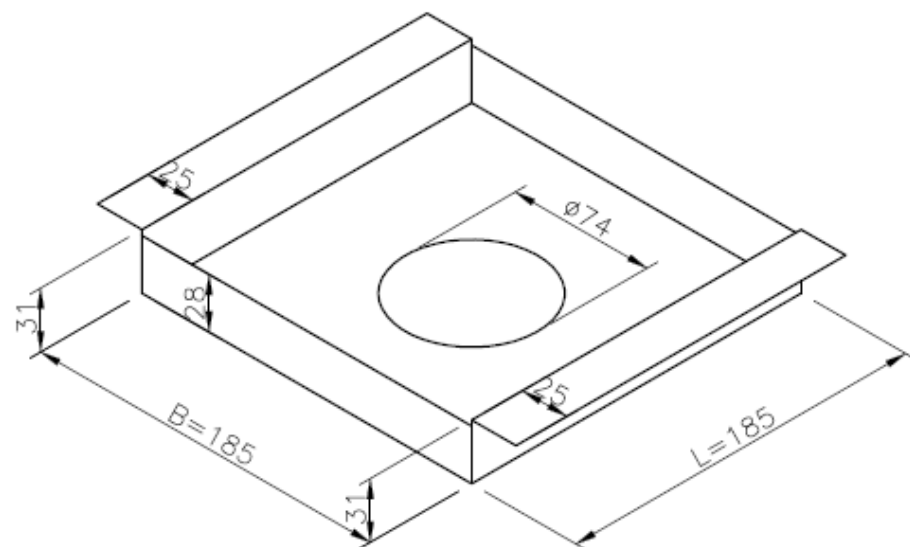


Date approved		Date received		Date shipped / - - - - -		META			
04.05.15									
Sign:		Rev. sign:		Rev. sign:		Rev. sign:			
ML									
Raster: 600x1200x30, rute 50x50						Tegn. nr.:		Rev. -	
ARMATURKASSETT						117064-3		bokstav	
3 : B185 x L185, HULL Ø74									
Ledelys (DL LED Ø74)									



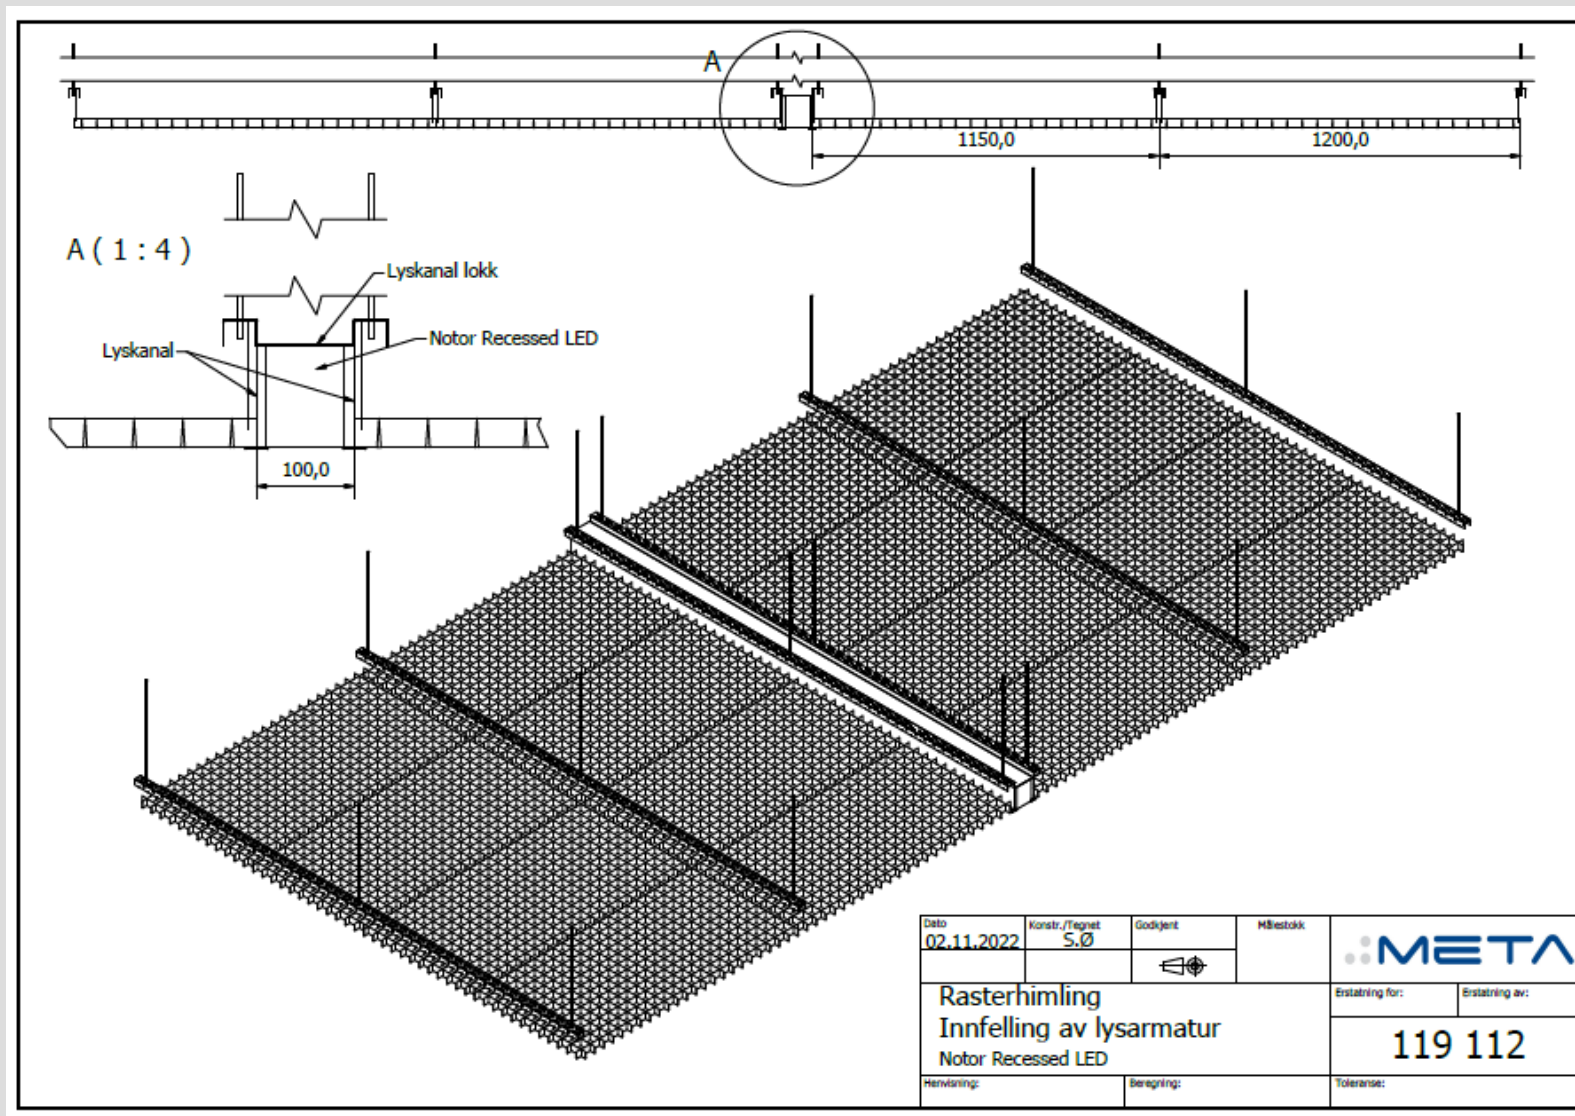

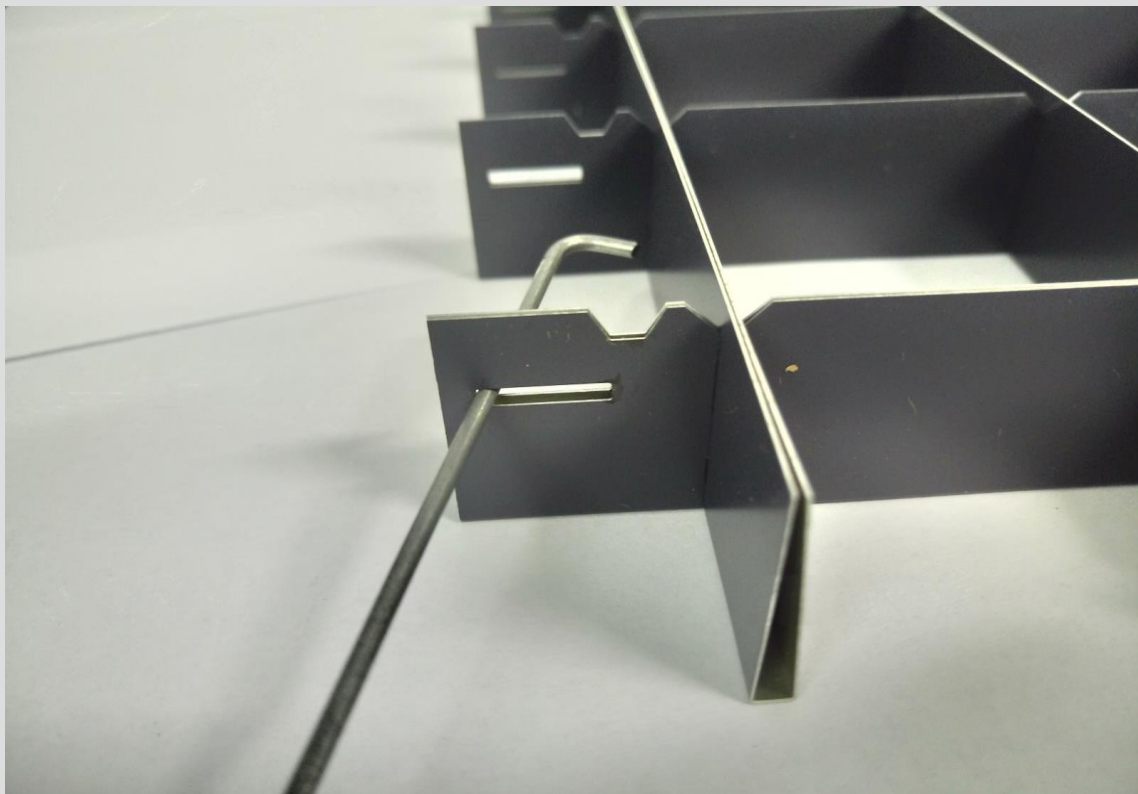

Delta fjær plasseres i åpningen. Gjenta for alle 4 hjørner av rasteret / panelet.

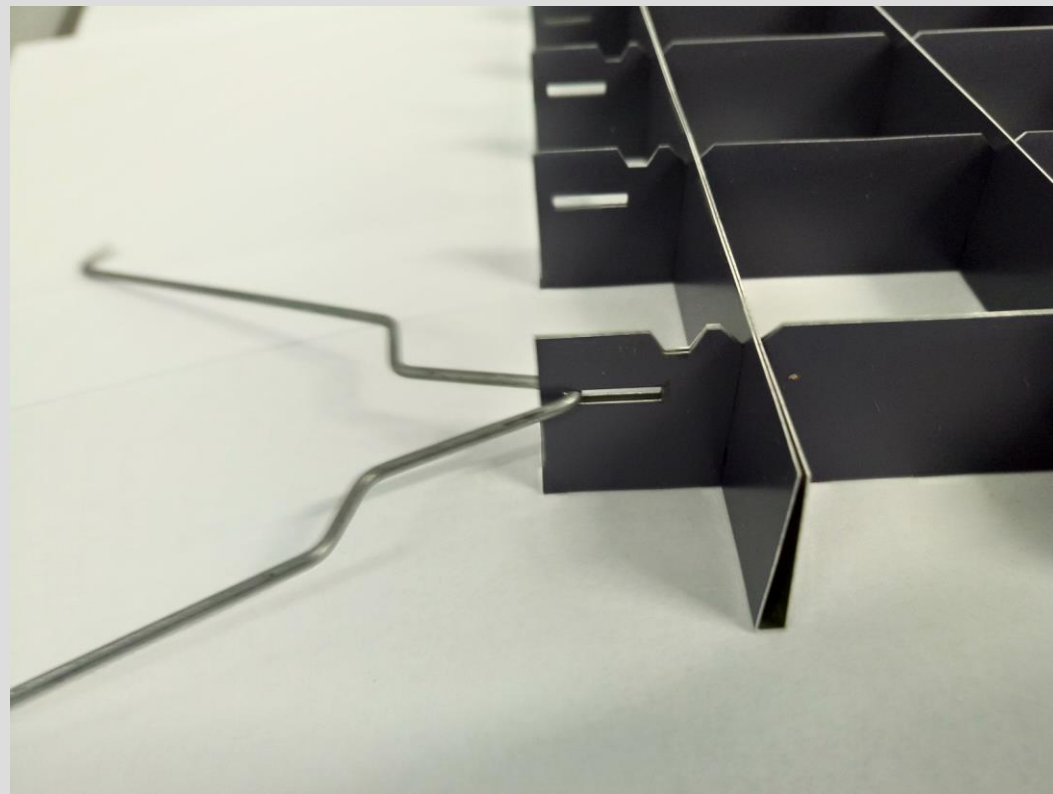

Fjæren presses og føres inn i opphengskanalen / bæreskinnens åpning. Slipp så fjæren så den henger fritt. Ikke press popover.





Gjenta prosessen på den andre siden og la rasteret / panelet henge fritt.



Gjenta prosessen også på den andre siden av rasteret / panelet og koble til på den andre opphengskanalen / bæreskinnen.





Ikke dytt fjæren popover, la rasteret / panelet henge fritt horisontalt.





Klem fjæren i enden av V formen for å lukke rasteret / panelet, bruk litt kraft for å dytte fjæren oppover - med den andre hånden før bladet inn i de avlange hullene i opphengskanalen / bæreskinnen så de møtes. Slipp så fjæren.



Gjenta prosessen på alle 4 hjørner av rasteret / panelet til det er på plass.



